


650W

N型双面



优异的温度系数 (Pmax) : $-0.290\%/^{\circ}\text{C}$

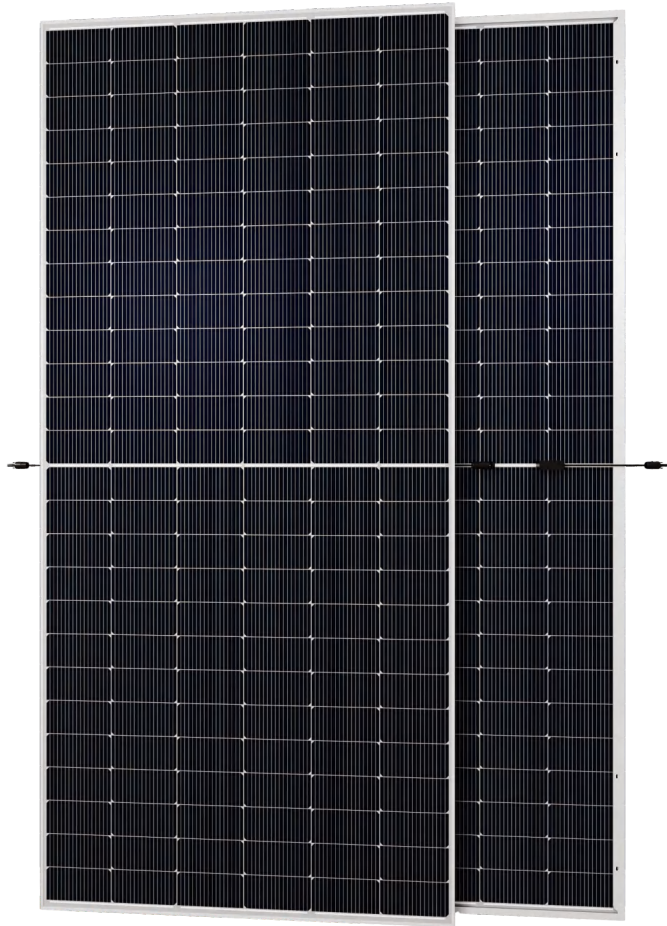

优异的弱光表现: 早晚发电时长延长最长1小时左右



具有更低的LID/LeTID衰减



双面率 $80\pm 5\%$, 双面发电增益随着背面受光增加, 显著降低度电成本



产品工艺质保



线性功率质保



IEC61215:2021/IEC61730:2023
 IEC61701/IEC62716/IEC60068/IEC62804
 ISO9001:2015(Quality management systems)
 ISO14001:2015(Environmental management systems)
 ISO45001:2018(Occupational health and safety)
 ISO14067:2018/PAS2050:2011

